


Fascia Cover LT

ANSI/SPRI ES-1 CERTIFIED: .040" Aluminum = 180 psf, 24GA Steel = 210 psf

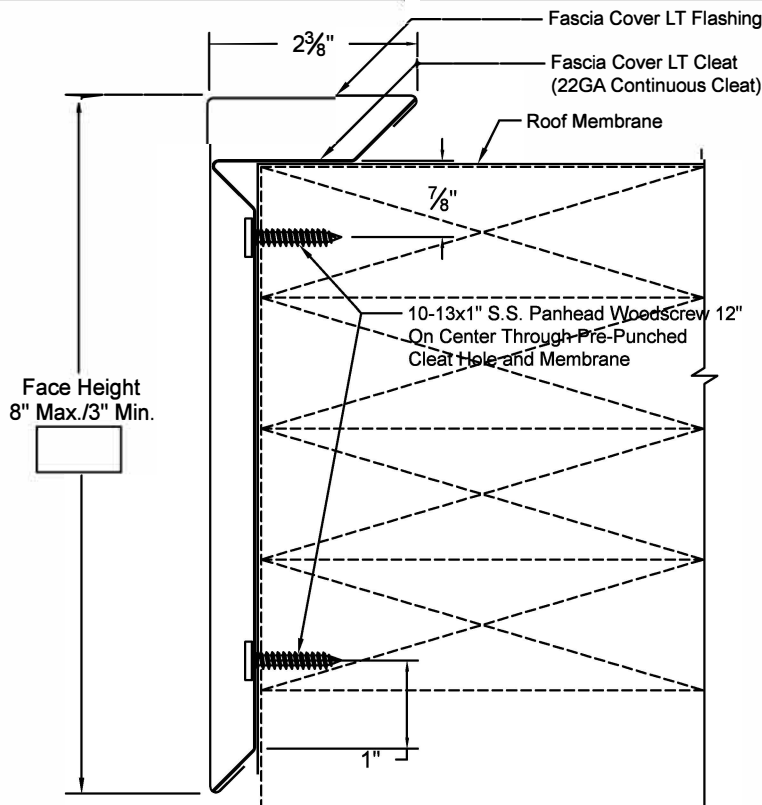

FACE HEIGHT	NAILER QTY.
8" max.	4
6"	3
4-1/2"	2
3" min.	1

- Continuous Cleat and Fasteners provided.
- Concealed Splice Plates provided.
- Splice Plate Sealant available for extra charge.

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Cuda's printed instructions.

Approved By: _____

Date: _____

QUANTITIES:

Lineal Feet (10'-0" Lengths): _____

Outside Miters**: _____ ☐ Optional Welded (Surcharge Applies)

Inside Miters**: _____ ☐ Optional Welded (Surcharge Applies)

Right End Caps**: _____ ☐ Optional Welded (Surcharge Applies)

Left End Caps**: _____ ☐ Optional Welded (Surcharge Applies)

Splice Plate Tape Sealant: ☐ Optional Sealant (Surcharge Applies)

** Standard riveted

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE:



Cuda Metals
411 N Elm Ave
North Wales, PA 19454
(215) 600-4565

MATERIAL:

☐ 24GA ☐ .040" AL

☐ Other: _____

Finish: _____

Color: _____

Effective Date: 9-22-14

Drawn By: J.S.

Approved By: B.P.