


Snap Coping - Max

ANSI/SPRI ES-1 CERTIFIED: 32" - .040" Aluminum = 100 psf, 24GA Steel = 75 psf

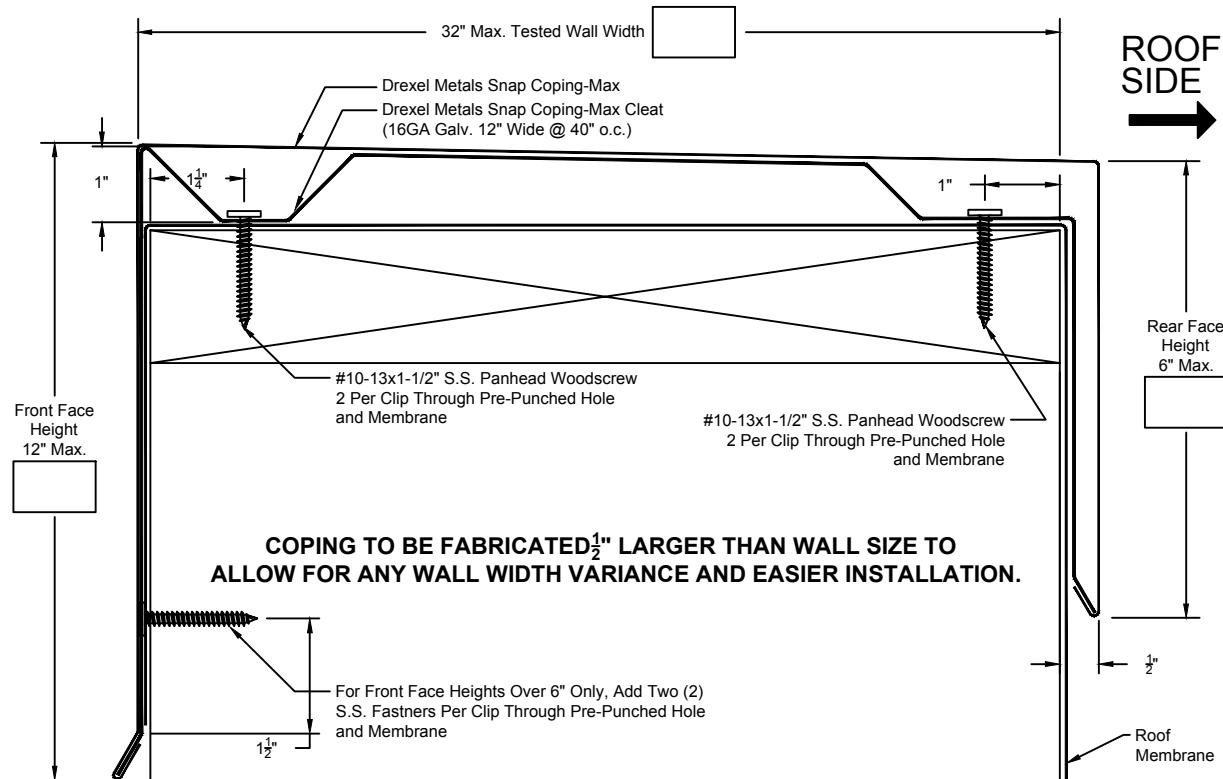

- Segmented Cleat and Fasteners provided.
- Concealed Splice Plates provided.
- Splice Plate Sealant available for extra charge.

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Cuda Metal's printed instructions.

Approved By: _____

Date: _____

QUANTITIES:

Lineal Feet (10'-0" Lengths): _____

Outside Miters*: _____ Optional Welded (Surcharge Applies)

Inside Miters*: _____ Optional Welded (Surcharge Applies)

Right End Caps*: _____ Optional Welded (Surcharge Applies)

Left End Caps*: _____ Optional Welded (Surcharge Applies)

Splice Plate Tape Sealant: Optional Sealant (Surcharge Applies)

* Standard riveted

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE: _____



Cuda Metals
411 N Elm Ave
North Wales, PA 19454
(215) 600-4565

MATERIAL:

24GA .040" AL

Other: _____

Finish: _____

Color: _____

Effective Date: 6-1-18

Drawn By: J.S.

Approved By: B.P.